


Windsor Bridge replacement project

Construction update – June 2019

Major work is continuing on the new Windsor Bridge to help improve traffic flow and provide a safe and reliable crossing over the Hawkesbury River at Windsor.

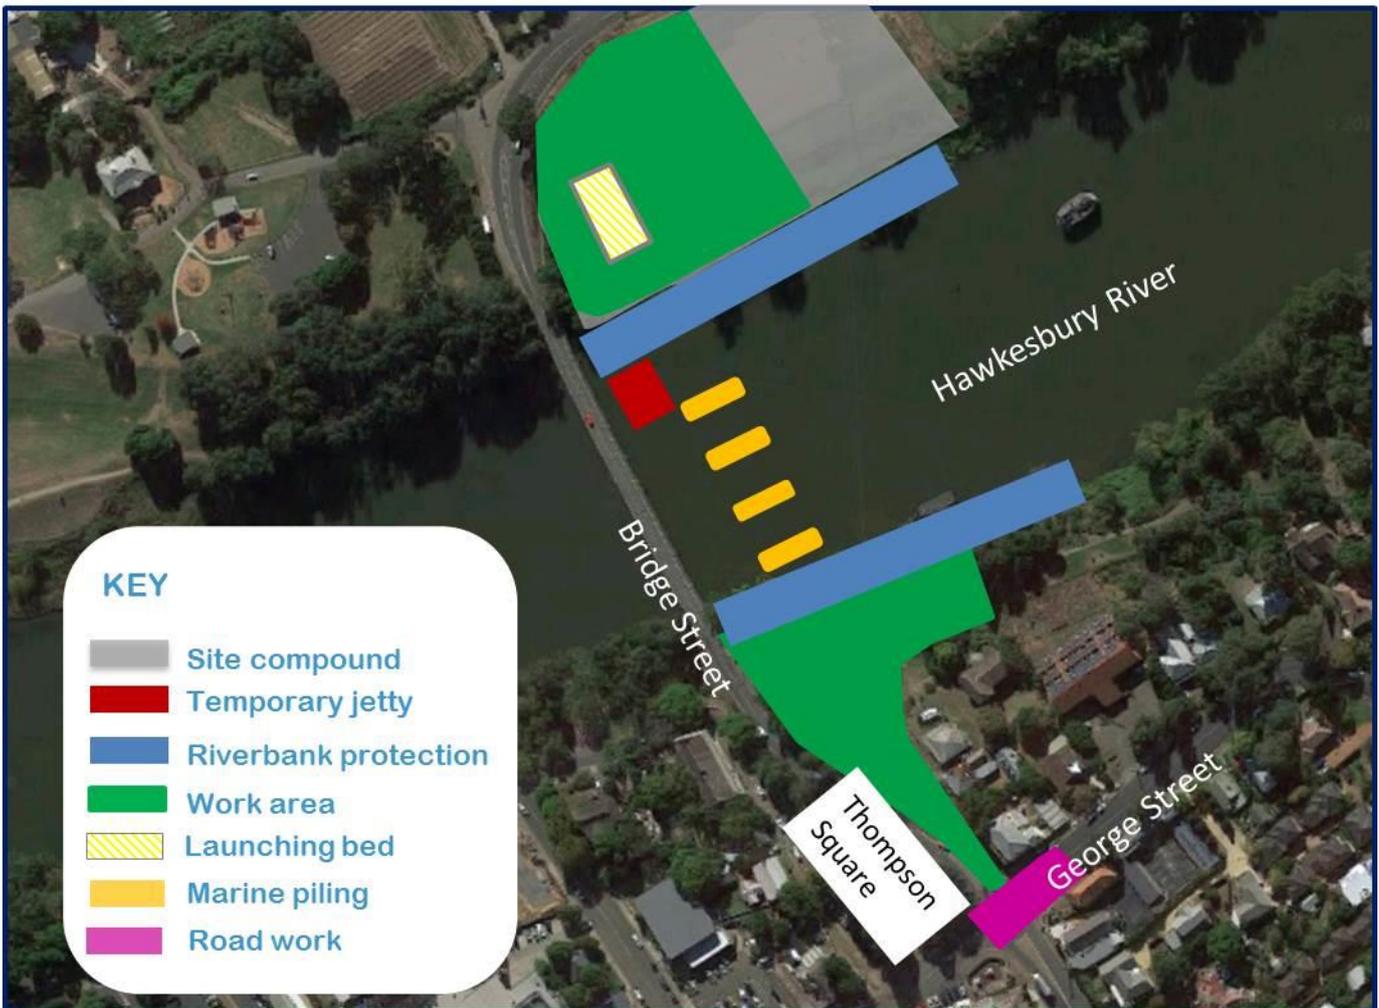

Note: Map and shaded areas are approximations for general information and illustrative purposes only.

Work to be carried out in **June 2019** includes:

Bridge construction

Launching of the bridge segments will continue as they are constructed. A total of ten deck segments will be poured and launched over the coming months. We will continue to construct the abutment and retaining walls on the southern side. Construction of the retaining wall for the future wharf carpark will also continue.

The barge will still be used as a support platform for the construction of the pier columns in the river.

Utility relocations

We will be installing a new electrical pole in the wharf carpark for the re-stringing of powerlines that cross the river. Installation of the new electrical network along Bridge Street and George Street will include, installation of a new pole, overhead services in George Street East, and trenching along Bridge Street.

Under each segment of the bridge, the services will be installed and then launched with each bridge segment.

Roadwork

Work will continue near the intersection of Bridge and George Streets. This work will involve construction of the roadworks and landscaping East of the new bridge from George Street/Bridge Street intersection downhill to the terrace. Concrete barriers will be relocated to the north east corner of the George Street/Bridge Street intersection. Initial work behind the barriers will include archaeology, pavement construction, services installation and overhead electrical work.

On the northern side of the river work will continue for the shoulder widening on Wilberforce Road. This will include new line marking, the installation of concrete barriers, earthworks and asphalt. Some of this work will be undertaken at night and traffic control will be in place when required.

Work will be generally carried out at night with traffic controls in place. Residents will be notified separately before any noisy work or night work is undertaken.

Archaeological work

Archaeologists continue to work in the project area. We will continue with archaeological monitoring and salvage on Bridge Street.

Our work schedule

Work will generally be carried out during standard construction hours between **7am** and **6pm**, on weekdays and from **8am** to **1pm** on **Saturday**, with some extended hours on **Saturday** from **8am** to **4pm**. There will be no work on public holidays.

Additional early morning concrete pours, starting from **4am**, will occur **no more than two mornings per week**.

How the work will affect you

There may be some noise and disruption associated with this work including vehicle movements. We will make every effort to minimise noise and disruption to the community during construction.

Temporary traffic changes will be in place to ensure the work zone is safe. Please follow the direction of traffic controllers and signs.

For the latest traffic updates, you can call 132 701, visit livetraffic.com or download the Live Traffic NSW App.

Contact

Please contact us on 1800 983 657, email windsorbridge@georgiou.com.au or visit rms.nsw.gov.au/windsorbridge.

Thank you for your patience during this work.



131 450

If you need help understanding this information, please contact the Translating and Interpreting Service on 131 450 and ask them to call us on 1800 983 657.