


CAST IRON FRAME AND COVER, CLASS "D";
OR SIMILAR; SIZED TO SUIT CONNECTING PIPES.

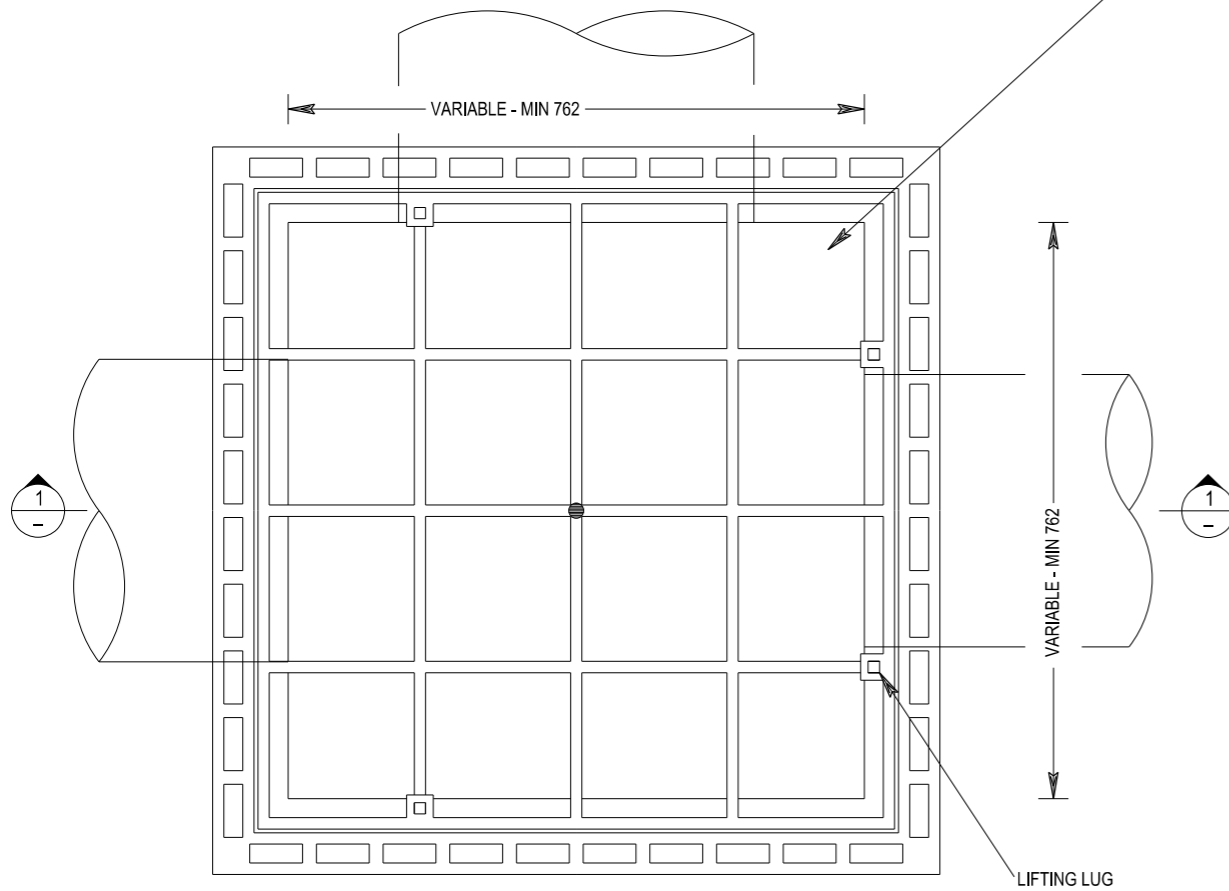


PLAN

MINIMUM PIT SIZE

DEPTH	MIN SIZE
0 - 1200	762 x 762
1200 - 2400	762 x 1295
OVER 2400	762 x 1600

CAST IRON FRAME & COVER SIZE

SINGLE	DOUBLE
762 x 762	762 x 1295
914 x 914	762 x 1600
	914 x 1295
	914 x 1905

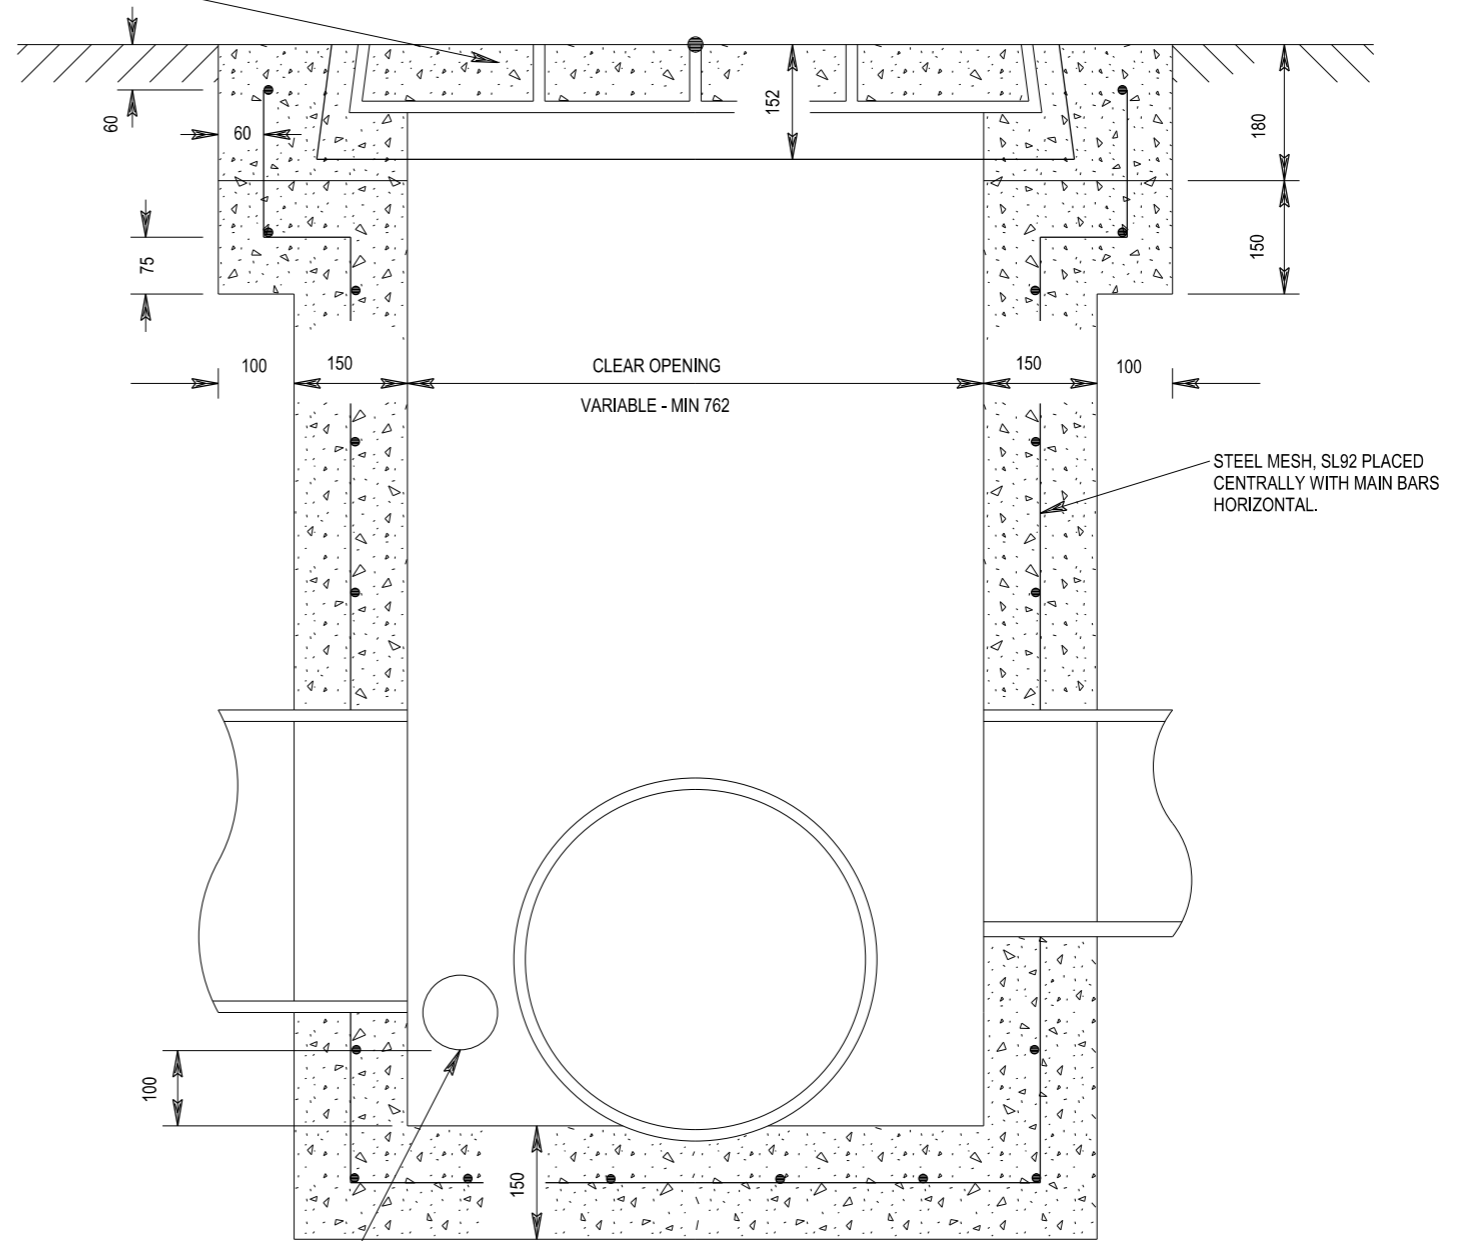

SECTION

NOT TO SCALE



NOTES

1. CONCRETE GRADE N25.
2. WALL THICKNESS AND REINFORCEMENT SHOWN SHALL APPLY TO ALL PITS UP TO 3500 DEEP.
3. PITS DEEPER THAN 1200 TO BE FITTED WITH GALVANISED STEP IRONS.
4. ALL REINFORCEMENT LAPS TO BE 300 LONG.
5. 100 DIA. HOLE FOR SUBSOIL DRAIN OUTLETS TO BE LOCATED 100 ABOVE INVERT LEVEL OF THE STORMWATER PIPES.
6. LOCATION AND LEVEL OF GULLY PIT SHOWN IN THE DRAWINGS REFER TO THIS POINT: ●

THIS DRAWING MAY BE PREPARED IN COLOUR AND MAY BE INCOMPLETE IF COPIED

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN			ISSUED		Transport Roads & Maritime Services	STANDARD DRAWING ROAD DESIGN ENGINEERING R0220 STORMWATER DRAINAGE SERIES - GULLY PITS INSPECTION PIT WITH SINGLE OR DOUBLE CAST IRON FRAME AND COVER SHEET 1 OF 1	A3				
QR CODE	SCAN TO CHECK DOCUMENT VER.										
		REV	DATE	AMENDMENT / REVISION DESCRIPTION	WVR No.	APPROVAL	SCALES ON A3 SIZE DRAWING CONTACT DETAILS SEND FEEDBACK ON THIS STANDARD DRAWING TO : technologystandards@rms.nsw.gov.au	SFR MANAGER ROAD POLICY, SPECIFICATIONS & TECHNOLOGY DATE 20.01.17	PREPARED BY ENGINEERING SERVICES ROAD POLICY, SPECIFICATIONS AND AND TECHNOLOGY	STANDARD DRAWING No. R0220-35	REV. -
						STATUS ISSUED	EDMS No. DS2014/005855	ORIGINAL ISSUE DATE JANUARY 2017	© Roads and Maritime Services		