



SECTION 1
NOT TO SCALE

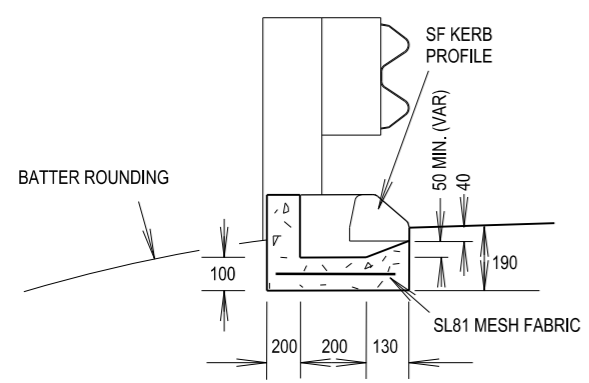

SECTION 3
NOT TO SCALE

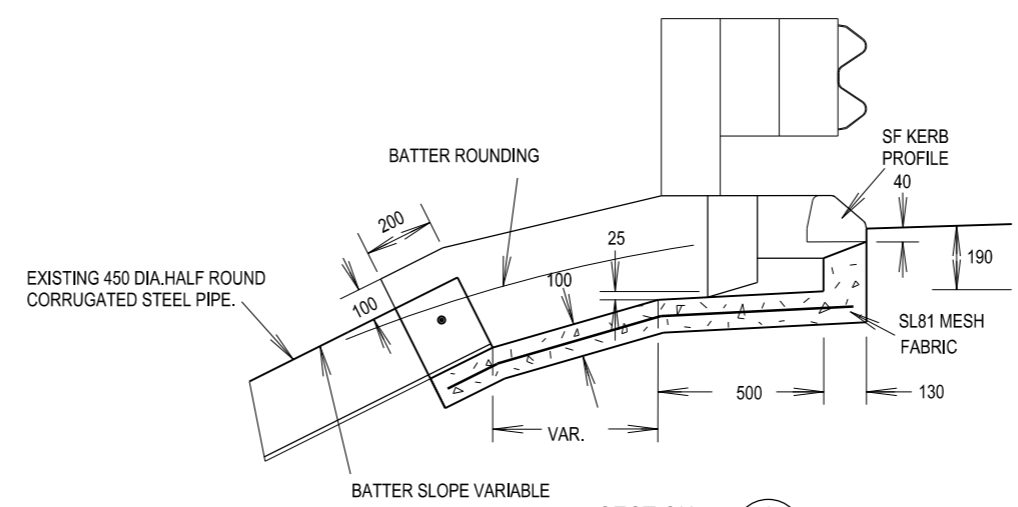

SECTION 2
NOT TO SCALE

- NOTES**
1. TOP LIP OF HALF ROUND CORRUGATED STEEL PIPE TO BE INSTALLED FLUSH WITH THE COMPACTED BATTER SURFACE.
 2. CONCRETE STRENGTH GRADE SHALL BE N25.
 3. CONSTRUCT GULLY PIT TO SUIT DIRECTION OF FLOW.

THIS DRAWING MAY BE PREPARED IN COLOUR AND MAY BE INCOMPLETE IF COPIED

50mm ON A3 SIZE ORIGINAL

QR CODE				SCAN TO CHECK DOCUMENT VER.				ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN				ISSUED		STANDARD DRAWING No. R0230-08		REV. -	
REV.				DATE				AMENDMENT / REVISION DESCRIPTION				SFR		R0230-08		REV.	
WVR No.				APPROVAL				SCALES ON A3 SIZE DRAWING				MANAGER ROAD POLICY, SPECIFICATIONS & TECHNOLOGY		EDMS No. DS2014/005881		ORIGINAL ISSUE DATE	
												DATE 20.01.17		PREPARED BY		JANUARY 2017	
												NSW GOVERNMENT		Transport Roads & Maritime Services		© Roads and Maritime Services	
												SEND FEEDBACK ON THIS STANDARD DRAWING TO : technologystandards@rms.nsw.gov.au		ENGINEERING SERVICES		ROAD POLICY, SPECIFICATIONS AND AND TECHNOLOGY	