
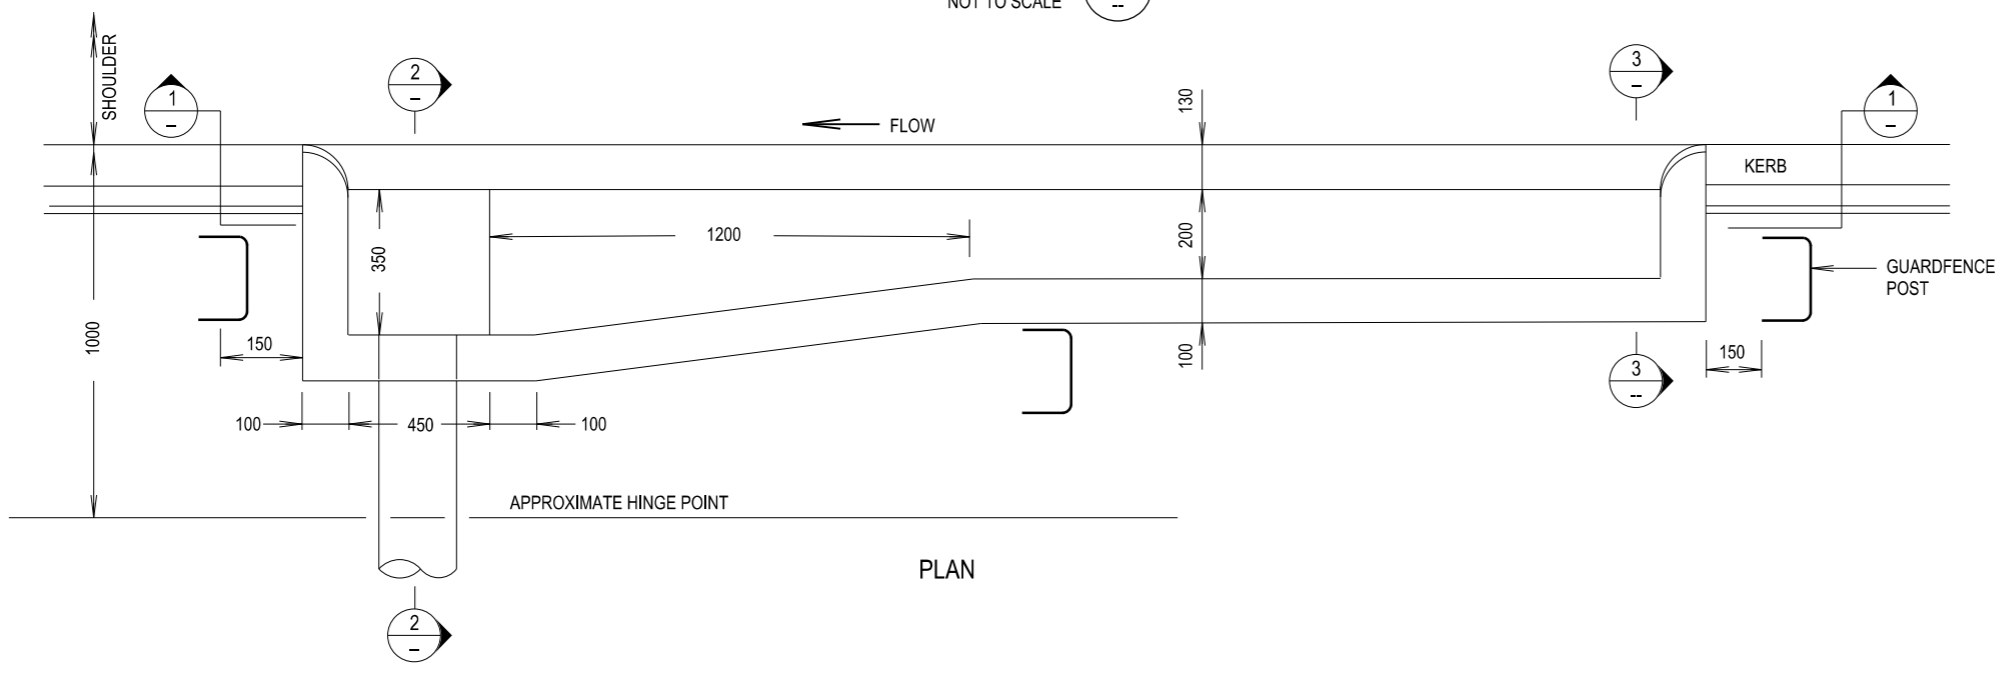
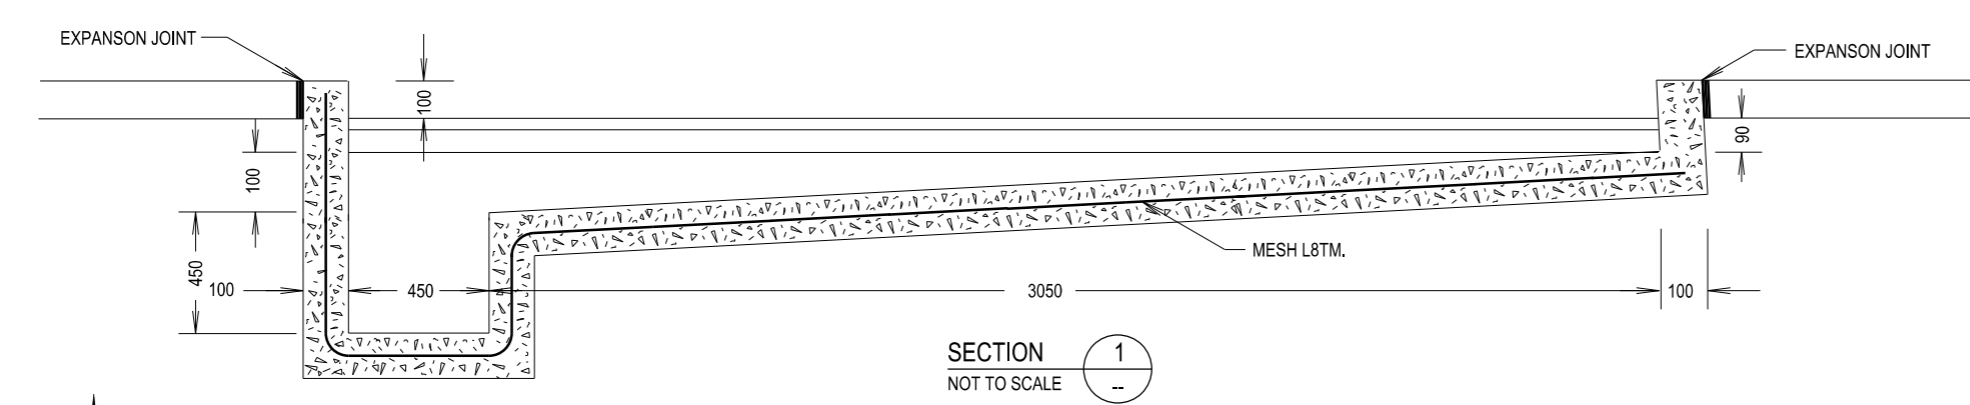


SUITABLE FOR DENSE CEMENT CONCRETE OR ASPHALTIC CONCRETE WEARING SURFACES. FOR TYPE OF WEARING SURFACES SEE DETAIL

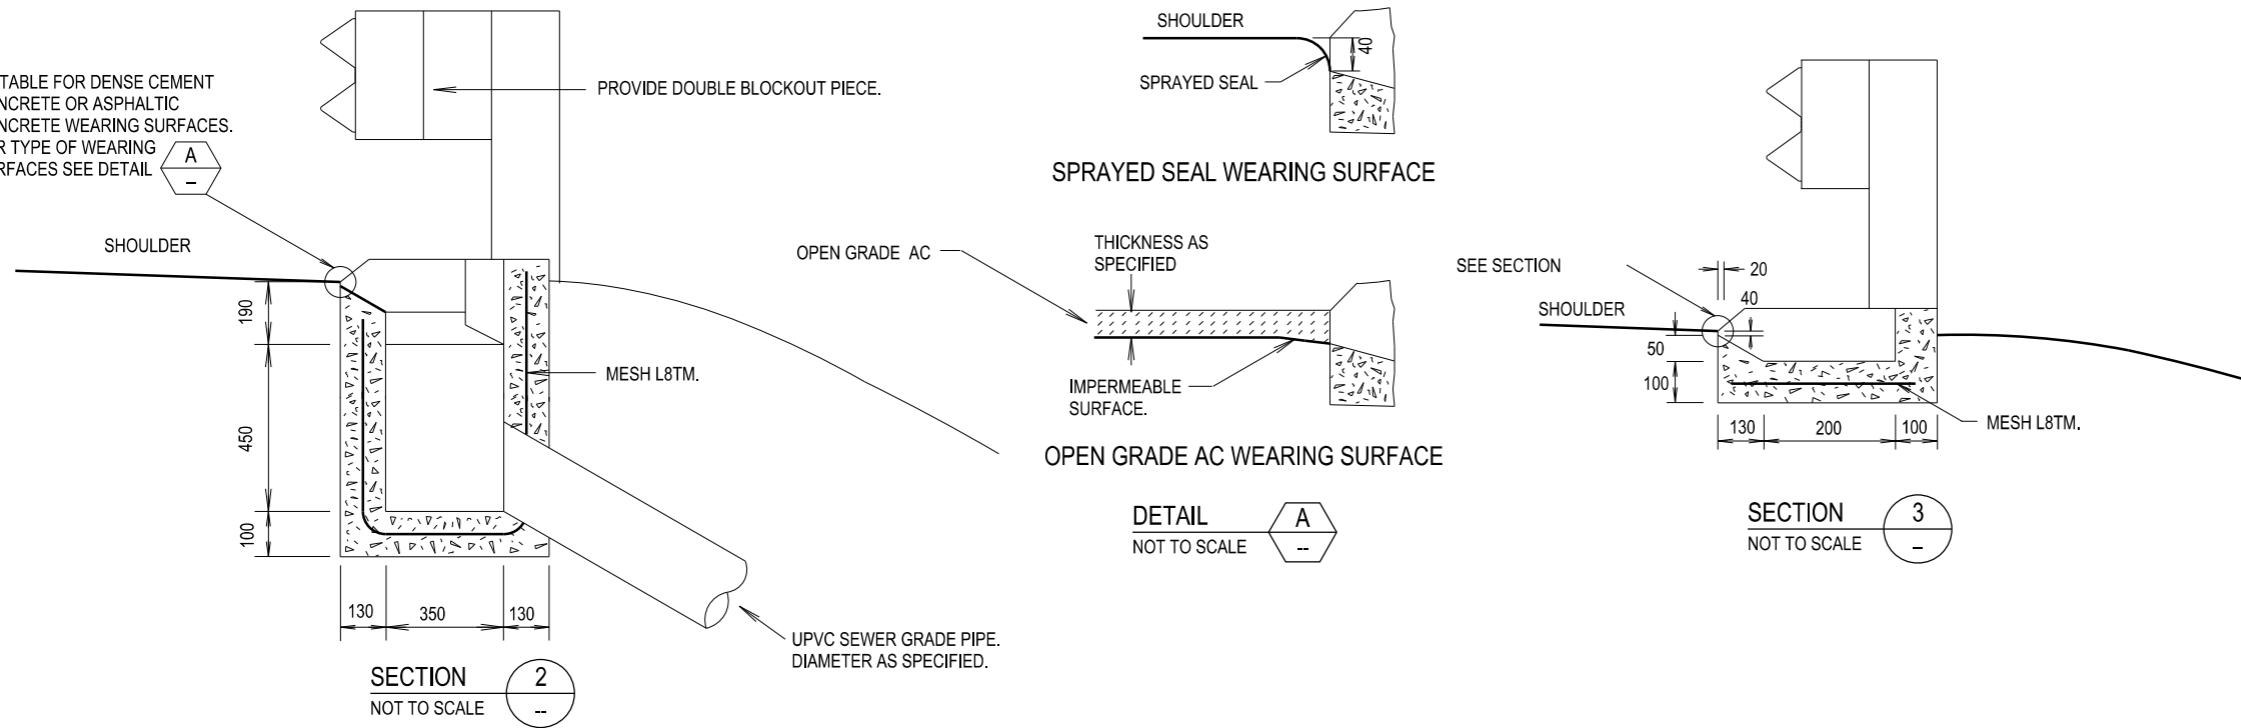

- NOTES**
- UPVC SEWER GRADE PIPE TO BE USED PIPE SIZES: 150, 225, 300
 - PIPE MANUFACTURER IN 6.0 LENGTHS. PIPES TO BE JOINED USING SOLVENT RECOMMENDED BY MANUFACTURER.
 - CONSTRUCT GULLY PIT IN REVERSE WHEN FLOW IS IN OPPOSITE DIRECTION.
 - CONCRETE QUANTITY 0.4 m³.

THIS DRAWING MAY BE PREPARED IN COLOUR AND MAY BE INCOMPLETE IF COPIED

50mm ON A3 SIZE ORIGINAL

QR CODE				SCAN TO CHECK DOCUMENT VER.				ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN				ISSUED		STANDARD DRAWING No. R0230-09		REV. -	
REV.				DATE				AMENDMENT / REVISION DESCRIPTION				SFR		ROAD DESIGN ENGINEERING		STATUS	
WVR No.				APPROVAL				CONTACT DETAILS				MANAGER ROAD POLICY, SPECIFICATIONS & TECHNOLOGY		R0230-09		ISSUED	
SCALE ON A3 SIZE DRAWING				DATE 20.01.17				SEND FEEDBACK ON THIS STANDARD DRAWING TO : technologystandards@rms.nsw.gov.au				PREPARED BY		EDMS No. DS2014/005882		ORIGINAL ISSUE DATE	
												ENGINEERING SERVICES		JANUARY 2017			
												ROAD POLICY, SPECIFICATIONS AND TECHNOLOGY		© Roads and Maritime Services			

