




Transport
Roads & Maritime
Services

Test method T233

Polishing value of aggregate

OCTOBER 2012

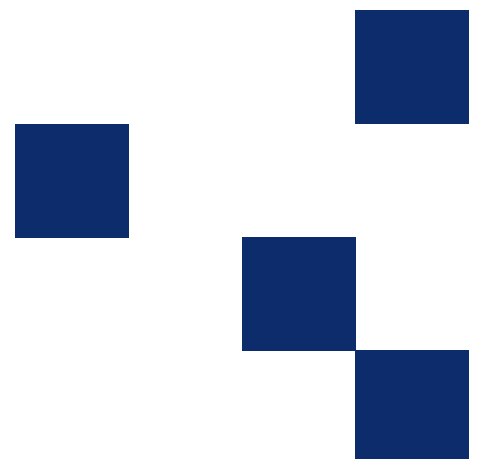

Revision Summary

Ed/Rev Number	Clause Number	Description of Revision	Authorisation	Date
		Reformatted and Revision Summary Added	D.Dash	May 1999
		Date on Test Method Revised to Agree with Date on Revision Summary	D.Dash	Feb 2001
Ed 2/ Rev 0	All	Reformatted RMS template	J Friedrich	October 2012

Note that Roads and Maritime Services is hereafter referred to as 'RMS'.

The most recent revision to Test method T233 (other than minor editorial changes) are indicated by a vertical line in the margin as shown here.

Test method T233

Polishing value of aggregate

1. Scope

This test method sets out the procedure for determining the polishing value of aggregate intended for bituminous surfacing.

The Polished Aggregate Friction Value (PAFV) is the friction value obtained on specimens at a temperature of 23°C, when determined in accordance with Test Method T231 after laboratory polishing treatment.

2. Apparatus, Procedure and Reporting

The test method is identical with the procedure in Australian Standard AS 1141.41 (Laboratory Polishing of Aggregate Using the Horizontal Bed Machine).